


# WyreStorm Essentials 1080p Plug-and-Play Video Conference Kit with PTZ Camera, Speaker and Microphone

## EXP-VC-KIT



## Quickstart Guide

 WyreStorm recommends reading through this document in its entirety to become familiar with the product's features before beginning the installation process.



### IMPORTANT! Installation Requirements

- Read through the [Wiring and Connections](#) section for important wiring guidelines before creating or choosing premade cables.
- Visit the product page to download the latest firmware, document version, additional documentation, and configuration tools.

### Communication Settings

The EXP-VC-KIT Camera contains a web UI that can be accessed by connecting to a network and entering the IP address. We recommend that the IP address is changed from default after accessing the web UI for the first time.

The camera also supports the standardized VISCA control protocol for issuing commands via a 3rd-party control system. See the full EXP-VC-KIT API document for additional control details.

The speakerphone contains 3 custom preset buttons that are used to program PTZ settings to quickly recall. To save a custom preset simply adjust the camera manually to the desired position and hold any of the 3 preset buttons for a minimum of 5 seconds.


### In the Box

- 1x EXP-VC-KIT-C 1080p Camera
- 1x EXP-VC-KIT-H Hub
- 1x EXP-VC-KIT-A Speakerphone
- 2x 10m 6-Pin DIN Data Cables
- 1x 12v DC 1.5A Power Supply
- 1x IR Remote
- 1x 3m USB 2.0 Cable
- 1x Quickstart Guide (This Document)

### IP Settings

<b>Default IP Address</b>	192.168.11.143
<b>Web UI Port</b>	80
<b>VISCA Port</b>	1259

### Basic Wiring Diagram

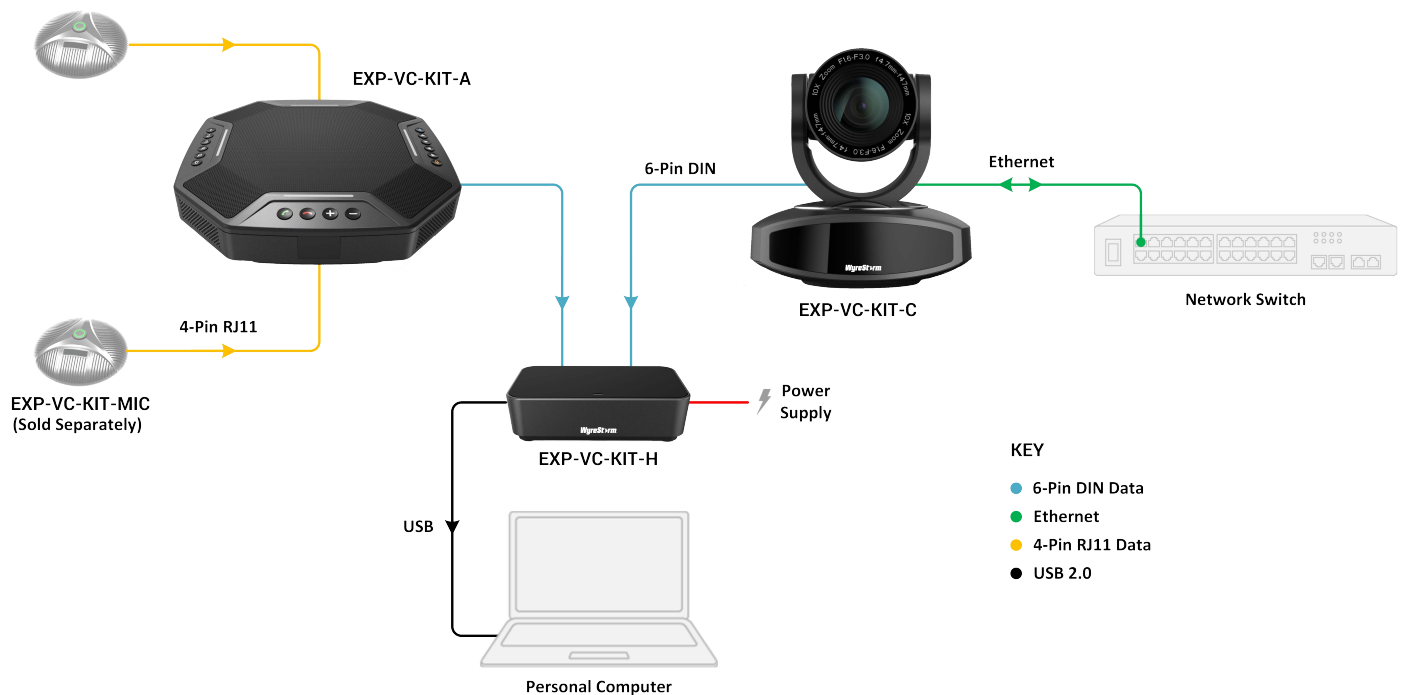

## EXP-VC-KIT-A



## Troubleshooting

### No Hub Connection to PC

- Verify that the Hub has a mains connection and that the power switch is turned on
- Avoid using a USB 3.0 connection on your PC. If possible, move USB connection to a USB 2.0 port.

### Answer/End Call Buttons Not Working

- The answer/end call buttons are designed to work with a Bluetooth connection from a mobile device. Conference software is not compatible with these buttons due to varying commands between platform.

### Camera Not Streaming Video on the Network

- Ensure the camera and the decoding software are on the same network.
- If using RTP Multicast, make sure the network switch being used is configured to handle Multicast traffic properly.
- Double check the configuration settings in the camera's web UI to make sure the protocol being used has been setup properly.

## Specifications

EXP-VC-KIT-C	
<b>Sensor</b>	1/2.8 inch high quality HD CMOS sensor
<b>Effective Pixels</b>	2.07M, 16:9
<b>Lens</b>	5x optical zoom, 10x digital zoom, f=3.1~15.5mm
<b>Viewing Angle</b>	83.7 (wide), 20.9 (tele)
<b>Aperature</b>	F1.8 - F2.8
<b>Illumination</b>	0.5 Lux (F1.8, AGC ON)
<b>Video Resolutions (Max)</b>	640x480 ~ 1920x1080 (5,10,15,20,25,30 FPS)
<b>Connections</b>	1x 6-Pin DIN (for connection to Hub)   1x 8-Pin RJ45 (for network streaming)
<b>Output Encoding</b>	Network: H.264   Protocol: RTP Multicast, RTSP, RTMP, HTTP
<b>White Balance</b>	Auto   Manual - 3000K, 3500K, 4000K, 4500K, 5000K, 5500K, 6000K, 6500K, 7000K
<b>SNR</b>	>55dB
<b>Rotation Angle</b>	Pan: -125 degrees ~ +125 degrees, Tilt: -30 degrees ~ +30 degrees
<b>Rotation Speed</b>	Pan: 0.1 ~ 65 degree/sec, Tilt: 0.1 ~ 35 degree/sec
<b>Dimensions</b>	151.64mm x 131.25mm x 154.5 mm (LxWxH)
<b>Weight</b>	0.83Kg   1.84lbs
EXP-VC-KIT-A	
<b>Microphone</b>	Acoustic Echo Cancellation (AEC) >65dB Echo length cancellation: >400ms Bidirectional noise compression (NC): <25dB Intelligent Directional Technology Automatic gain control Frequency Response: 100Hz - 22KHz Sound pick-up diameter: 6 meters   10 meters with EXP-VC-KIT-MIC (Sold Separately)
<b>Speaker</b>	Frequency response: 100Hz - 22KHz Max output: 95dB
<b>Bluetooth</b>	Bluetooth 4.0
<b>Connections</b>	1x 6-Pin DIN (for connection to Hub)   2x 4-Pin RJ11 (for EXP-VC-KIT-MIC)
<b>IR</b>	Angle: 360 degrees   Distance: 10m
<b>Dimensions</b>	200mm x 200mm x 55.9mm (LxWxH)
<b>Weight</b>	1.10Kg   2.43lbs
EXP-VC-KIT-H	
<b>Connections</b>	2x 6-Pin DIN (for camera and speakerphone)   1x Mini USB (for connection to PC)
<b>OS Compatibility</b>	Windows, MacOS, Linux
<b>Power</b>	12V 1.5A DC
<b>Dimensions</b>	100mm x 62mm x 27mm (LxWxH)
Regulatory	
<b>Safety and Emission</b>	CE   FCC   RoHS

**Note:** WyreStorm reserves the right to change specification, appearance or dimensions of the product at any time without prior notice.

### Warranty Information

WyreStorm Technologies LLC warrants that its products to be free from defects in material and workmanship under normal use for a period of two (2) years from the date of purchase. Refer to the Product Warranty page on [wyrestorm.com](http://wyrestorm.com) for more details on our limited product warranty.

