

MS-10

4K Video Soundbar



The Lumens® MS-10 all-in-one conference camera with 4K 30fps ultra-wide image quality. The advanced auto framing makes everyone can be seen. It builds in five microphones ensuring captures every participant's voice clearly. Designed for medium to large meeting rooms.

Key Features

- Unified Communications Video Soundbar
- One USB Cable with Video, Audio, and Ethernet
- 4K UHD Wide-Angle Camera with Auto Framing
- The Passive Diaphragm Speaker Makes the Sound Performance Close to Reality
- Five Built-in Microphones

Key Feature Details



4K Ultra HD Image

Stream crystal-clear video with superb 4K resolution. MS-10 delivers Ultra HD at 30 fps for superior clarity and image details.



Advanced Auto-Framing

Equipped with auto-framing function and super-wide 120° field of view, frames and captures everyone in the meeting.



Built-in Microphones

High-sensitive microphones capture speaker wherever they are, ensures they can be heard clearly.



One Cable Connectivity

One USB cable with video, audio and Ethernet makes installation with ease and minimizes cable clutter.

Applications



Video Conference



Distance Learning





Telehealth

Product Specifications

Camera		Speaker	
Sensor	1/2.8" 8.29MP CMOS	Configuration	20W, speaker element x1 + passive diaphragm x1
VFoV	120°	Frequency Response	20Hz ~ 20KHz
Lens	Fixed Lens (F2.2)	Speaker Max SPL	95±3db 0.5m/5W
Resolution (Max.)	3840x2160	Distortion	5% AT 5.0W / 4.47V 1KHZ
Minimum Focus Distance	50 cm	Interface	
Zoom	4x	DC In	Input: 110 ~ 240 VAC, 50/60 Hz, 1.0A max.
ePTZ	Yes	USB	USB 3.0 type-B, compatible USB2.0
Auto Framing	Yes	RJ-45	USB bridge to Ethernet
WDR	Yes	LED Indicator	Ring, 3 color LED (Green, Blue, Red)
2D/3D Noise Reduction	Yes	Remote Controller	Yes
Video Format	YUV / NV12 / MJPEG / H.264	Others	
Presets	3 for IR Remote Control 128 for USB Command	Kensington	Yes
Built-in Mic		Mount	TV Mount, bracket
Mic Element	5 Mics	Weight	3.8 lbs (1.7 kg)
Pickup Distance	5 Meters	Dimensions (WxLxH)	23.51" x 3.55" x 2.95" (597 x 90 x 75 mm)
Frequency Response	50Hz ~ 8KHz		
Sensitivity	-16 dBV		
SNR	76 dBV		
Echo Cancellation	Yes		
Noise Suppression	Yes		

Compatible Software User Interface

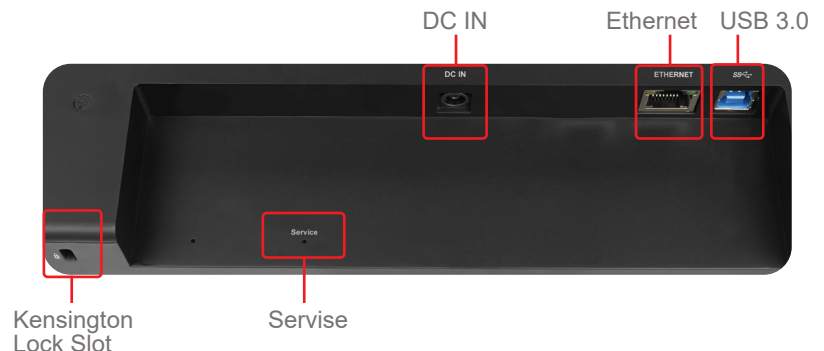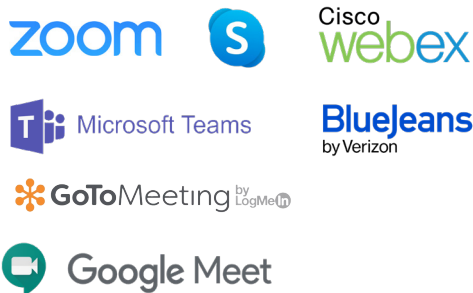

Lumens[®]

Lumens Integration, Inc.
4116 Clipper Court
Fremont, CA, 94538
Phone: +1-866-600-0988
Fax: +1-510-252-1389

Lumens Europe
De Nayerstraat 17 9470
Denderleeuw Belgium
Phone : +32-473-58-38-95
Fax : +32-2-452-76-00



www.MyLumens.com