SMS FLATSCREEN **X**
FH M605/1105/1455/1955

Easy to place, easy to use.
This is a very flexible solution mounted on wheels that allows the screen to be mounted in both a vertical and horizontal position. The bracket can be fitted with electrical power sockets (available as an option) and it is easy to add shelves and cabinets for DVDs and other peripherals.

The X series is characterised by clean and refined features. The cable holder, for example, into which it is easy to place all cables by hand. The surface finish has also been given extra attention.

X

SMS FLATSCREEN **X** - FH M605/1105/1455/1955

INFO

- Finish: A/W (Aluminium/white).
- Max. load: 50 kg/screen. The optional accessory SMS X H+ Unislide enables the bracket to bear up to 100 kg/screen. Length (column): 1105, 1455 or 1955 mm.
-

Delivered as standard with our Unislide - SMS X H Unislide, which can be used with all VESA standards from 200x200 to 800x400mm.(Screens ~40-55"). The SMS X H+ Unislide is available as an option. This can be used with all VESA standards from 200 x 200 to 1200 x 700 mm. (Screens ~60-80").

ART. NO	DESCRIPTION
PD031001-P0	SMS Flatscreen X FH M1105 A/W
PD031002-P0	SMS Flatscreen X FH M1455 A/W
PD031003-P0	SMS Flatscreen X FH M1955 A/W

ACCESSORIES:

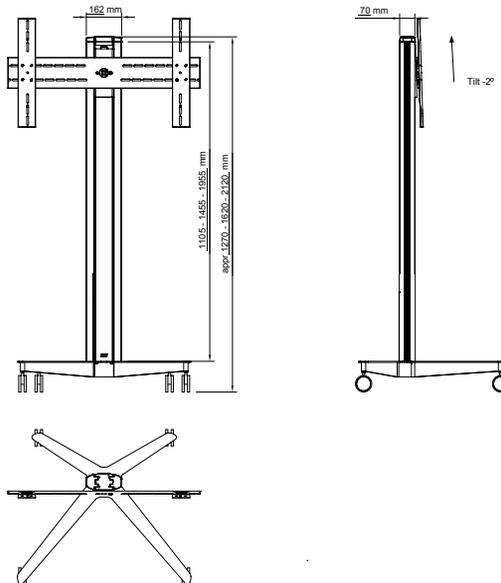|	
PD100001	SMS Power Socket EU (Schuko)
PD100002	SMS Power Socket CH
PD100003	SMS Power Socket UK
PD210002	SMS X H+ Unislide*
PD300005-P0	SMS X Shelf White*
PD300006-P0	SMS X Shelf Oak*
PD300007-P0	SMS X Shelf Walnut*
PD400001	SMS X Media Box White*
PD400003	SMS X Media Box Oak*
PD400004	SMS X Media Box Walnut*
PD410001	SMS X Media Box Rack Accessory*

*More info in separate data sheet.

All peripheral equipment readily available using practical accessories such as shelves and cabinets.

Electrical power sockets can be mounted at the rear.

SMS FLATSCREEN X FH M

162 mm

70 mm

Tilt -2°

1105 - 1455 - 1955 mm

appr. 1270 - 1620 - 2120 mm

www.smartmediasolutions.se